

AUTOMATIC VOLTAGE SERVO STABILIZER



AN ISO
9001 : 2000



Quality Reliability & Precision Work


IEEC

CLAIM 100 % DEPRECIATION
AS PER INCOME TAX ACT
APPENDIX - 1 (3E) C



Manufactured By :

INDUSTRIAL ELECTRICAL CORPORATION

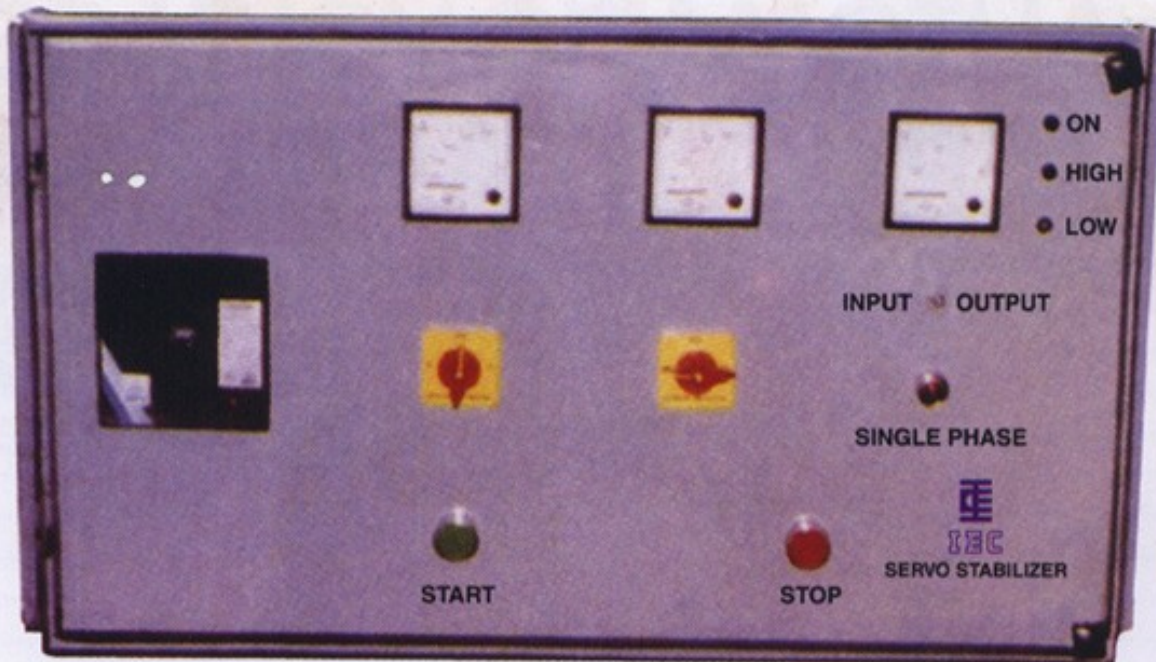

FEATURES :

IEC SERVO CONTROLLED VOLTAGE STABILIZER is design & Manufacturer as per ISI specification by skield Engineers. It is reliable product for stable supply. It's fast correction ratio against quick voltage fluctuation ensure trouble free operation for high precision electrical trouble & Sophisticated electronic equipments. Sitting in fully Ventilated sheet metal cabinet sprayed with lacquer finish paints. It's rugged build & sleek looks make it a truly top-of-the-line product.

SPECIFICATION :

SINGLE PHASE

Input	:	170 V to 270 Volts A.C.
Output	:	230 V.A.C. $\pm 0.5\%$ Adj.
Frequency	:	47-51 Hz
Phase	:	single
Line Regulation	:	$\pm 1\%$
Load Regulation	:	$\pm 1\%$
Over Load capacity	:	120% For 1 Minutes.

THREE PHASE :

Input	:	300 V to 460 V.A.C.
Output	:	415 V.A.C. $\pm 0.5\%$ Adj.
Frequency	:	47-51 Hz
Phase	:	Three.
Line Regulation	:	$\pm 1\%$
Load Regulation	:	$\pm 1\%$
Over Load capacity	:	120% For 1 Minutes.
Capacity	:	1 K.V.A. to 1500 K.V.A.

APPLICATION :

The IEC is an indispensable companion with all high tech electrical & electronic equipments & machinery requiring steady input. It will find fruitful applications in.

COMPUTER CENTERS
HOSPITALS
OFFICES
FACTORIES
SCIENTIFIC LABORATORIES
ZEROX CENTERS
EDP CENTERS

DESIGN FEATURES :

A complete solid state design using Relay drivers.
Fast rate of correction grater than 36 Volts/Sec.
Short-Circuit protection
Overload protection
Output error is less than 0.5%
Efficiency is greater than 95%
Waveform distortion is zero
Visual warning with LED's against very high & very Low input Voltages.
Performance unaffected by load powerfactor.

OPTIONAL FEATURES :

Audio alarm at high low inputs
Automatic high/low cut out facility with manual reset.
Transient suppression network.
Line noise suppression network.

Other input voltage ranges.
160-260 V/ 160-280 V/ 180-300 V/ 150/300 V.
300-460 V/ 330-460 V/ 360-460 V/ 360/500 V.

Also Available Servo Voltage Stabilizer
With output voltage of 110 V.

All the contains provided in catalogue and subject to revision due to technology upgradation. All recipients are requested to due to contact factory for latest information prior to placing an order.



INDUSTRIAL ELECTRICAL CORPORATION

Manufactured By :
602, Phase IV, B/h. Maruti Weigh - Bridge,
GIDC Vatva, Ahmedabad - 382 445.

Tel. (F) 5831047 Fax : 079-5834379 Mobile : 98240 01342
E-mail : iec@ad1.vsnl.net.in Web site : iecindia.com